


AMPS	PHASE	VOLTAGE
125-200	1	240/120
125-600	3	208Y/120
601-1600	3	208Y/120 OR 480Y/277
1601-ABOVE	3	480Y/277



NOTES:

1. ALL SERVICE LOCATIONS, MATERIALS, EQUIPMENT SHALL BE APPROVED BY ELECTRIC DEPARTMENT.
2. 36" MINIMUM CLEARANCES (SIDES AND ABOVE) FROM DOORS, WINDOWS, STAIRS, GAS METERS SHALL BE OBSERVED. ADDITIONAL CLEARANCES MAY BE REQUIRED.
3. 8' MINIMUM CLEARANCE SHALL BE REQUIRED IN FRONT OF SERVICES, METERS. ADDITIONAL CLEARANCES MAY BE REQUIRED.
4. CITY WILL FURNISH METERBASE & TEST SWITCH FOR CONTRACTOR TO INSTALL. (SEE ELECTRIC DEPT.)
5. GROUNDING & BONDING OF CABINETS, CONDUITS, & OTHER EQUIPMENT SHALL MEET NEC.
6. SERVICES 200 AMPS OR LESS SHALL USE A LINK BYPASS METERBASE.
7. SERVICES SIZED 800 AMPS OR LESS MAY USE STAND ALONE TYPE CT CABINETS. FOR SERVICES LARGER THAN 800 AMPS CONTACT THE ELECTRIC DEPARTMENT.
8. SERVICES 800 AMPS OF LESS USE CT CABINET MILBANK P/N: CT364811-HC & MOUNTING RACK P/N: K4798 OR AN APPROVED EQUIVALENT.
9. SERVICE CONDUITS SHALL BE A MINIMUM OF 4' IN DEPTH, AND MEET CITY STANDARDS.
10. ELECTRICAL CONTRACTOR SHALL PROVIDE & INSTALL SERVICE CONDUCTORS, & SHALL MAKE CONNECTIONS IN THE SECONDARY SIDE OF THE TRANSFORMER.
11. CUSTOMER SHALL OWN & MAINTAIN SERVICE CONDUCTORS FROM TRANSFORMER TO THE CUSTOMER SERVICE DISCONNECT.

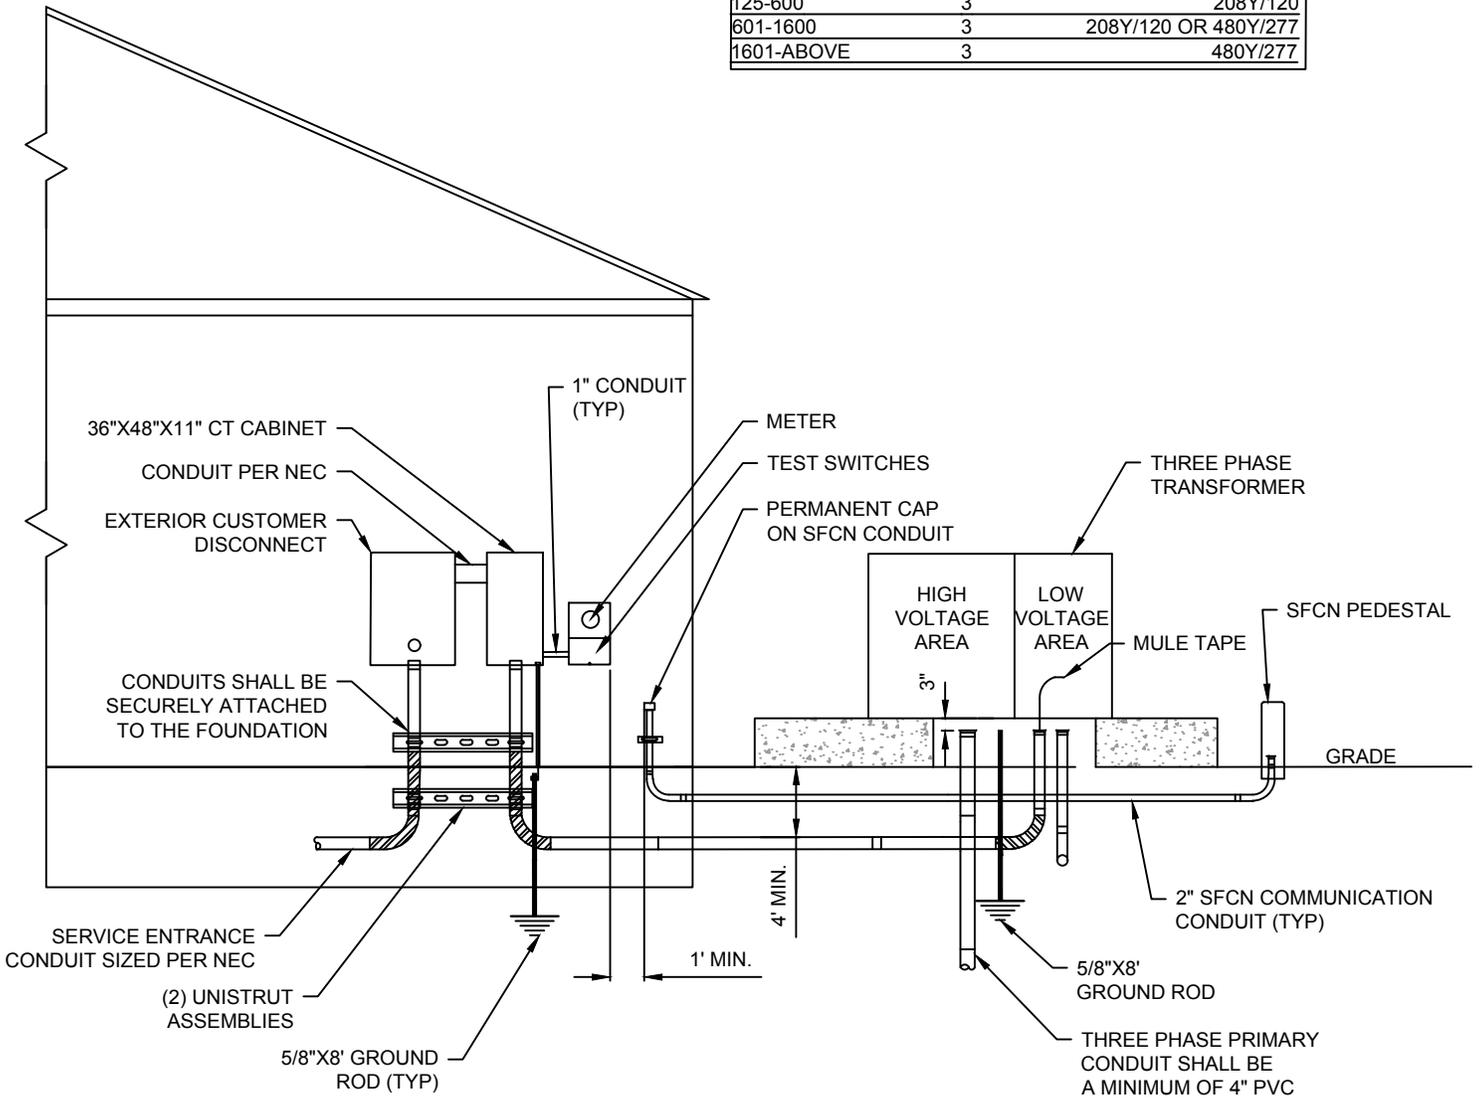

SPANISH FORK CITY
 40 SOUTH MAIN STREET
 SPANISH FORK, UT 84660
 (801) 804-4550

STANDARD DRAWING

3 PHASE UNDERGROUND SERVICE 201-800 AMPS

DRAWN: JLR
 DESIGN: CJP
 CHECK: CMT
 DATE: 6/22/16

SCALE:
 NONE
 STANDARD
 81