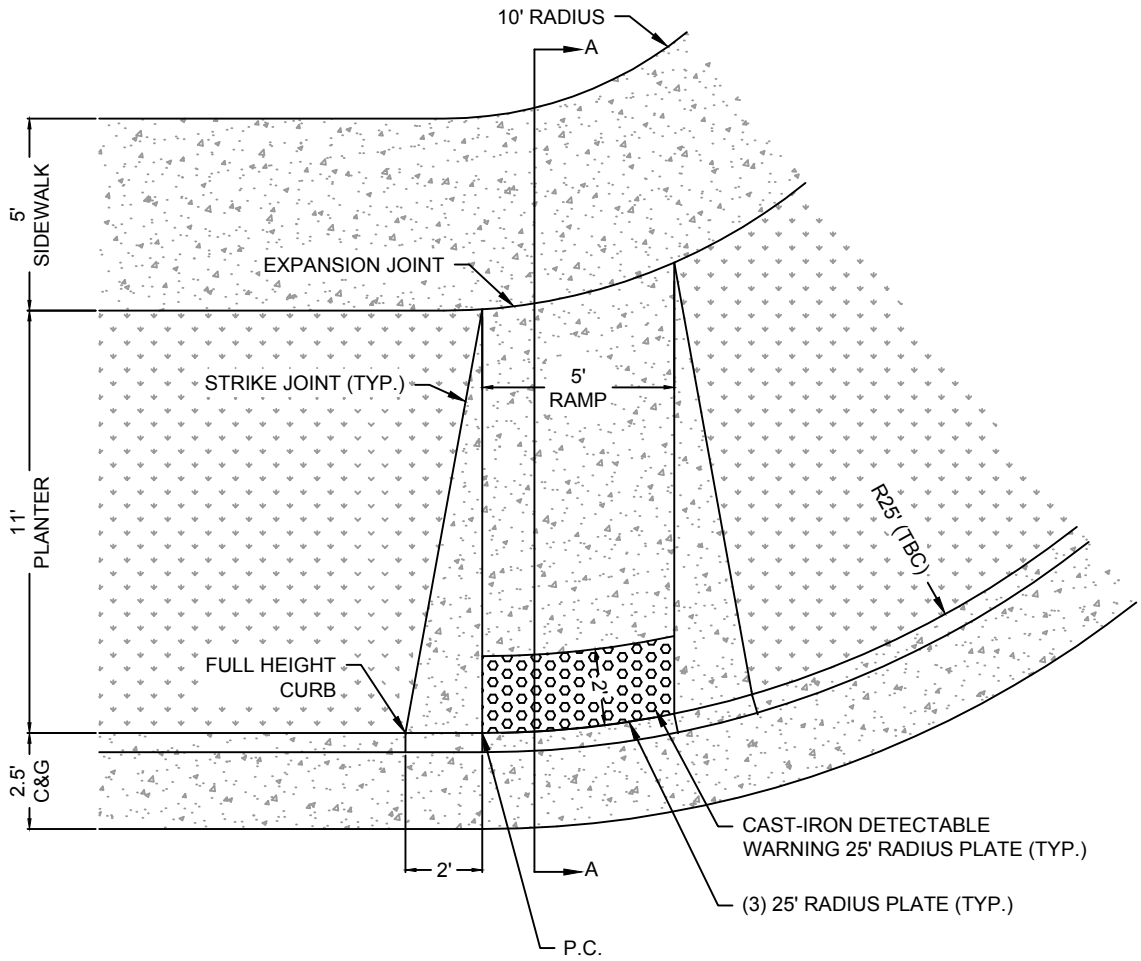

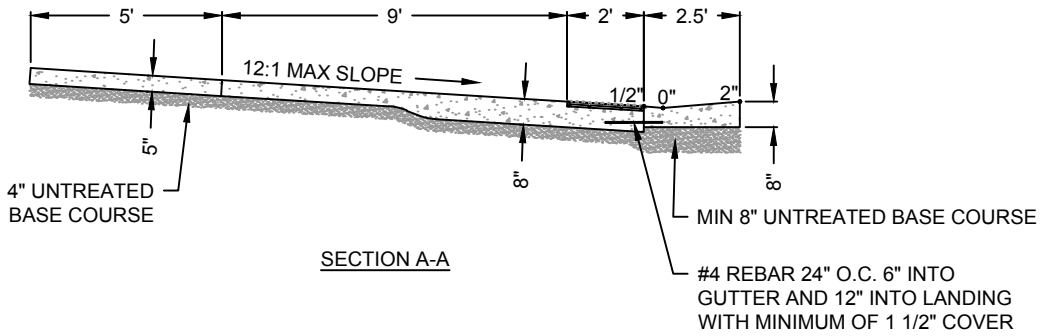

SECTION A-A

NOTES:

1. RAMPS SHALL HAVE A 1:12 MAXIMUM SLOPE, WITH A MAXIMUM 2% CROSS SLOPE. ALL OTHER SIDEWALK AND LANDING SHALL HAVE A 1:48 MAXIMUM SLOPE.
2. CONTRACTOR SHALL INSTALL PAVERS ACCORDING TO THE STANDARDS FOR CAST-IRON DETECTABLE WARNING PLATES AND MATCH PATTERN IN THIS DRAWING. RADIAL PLATES SHALL BE A EAST JORDAN IRON WORKS OR APPROVED EQUIVALENT AND SHALL BE ACCORDING TO THE CORRECT TBC RADIUS.
3. CONCRETE SHALL BE 7 INCHES THICK THROUGHOUT RAMP.
4. IF CONCRETE IS TO BE POURED NEXT TO A CURB, #4 REBAR SHALL BE DOWELED 6" INTO CURB AND 12" INTO SIDEWALK. REBAR SHALL BE INSTALLED A MINIMUM OF 1 1/2" FROM TOP OF THE SIDEWALK AND CURB 24" O.C.
5. MODIFICATIONS TO THIS STANDARD MUST BE APPROVED BY THE CITY.
6. DETECTABLE WARNINGS SHALL CONSIST OF RAISED TRUNCATED DOMES WITH A DIAMETER OF NOMINAL 0.9 IN, A HEIGHT OF NOMINAL 0.2 IN AND A CENTER-TO-CENTER SPACING OF NOMINAL 2.35 IN.

SPANISH FORK CITY
40 SOUTH MAIN STREET
SPANISH FORK, UT 84660
(801) 804-4550

STANDARD DRAWING

REDUCED WIDTH RAMP DESIGN

DRAWN:	JLR
DESIGN:	CJP
CHECK:	CMT
DATE:	7/14/16

SCALE: NONE

STANDARD 58