
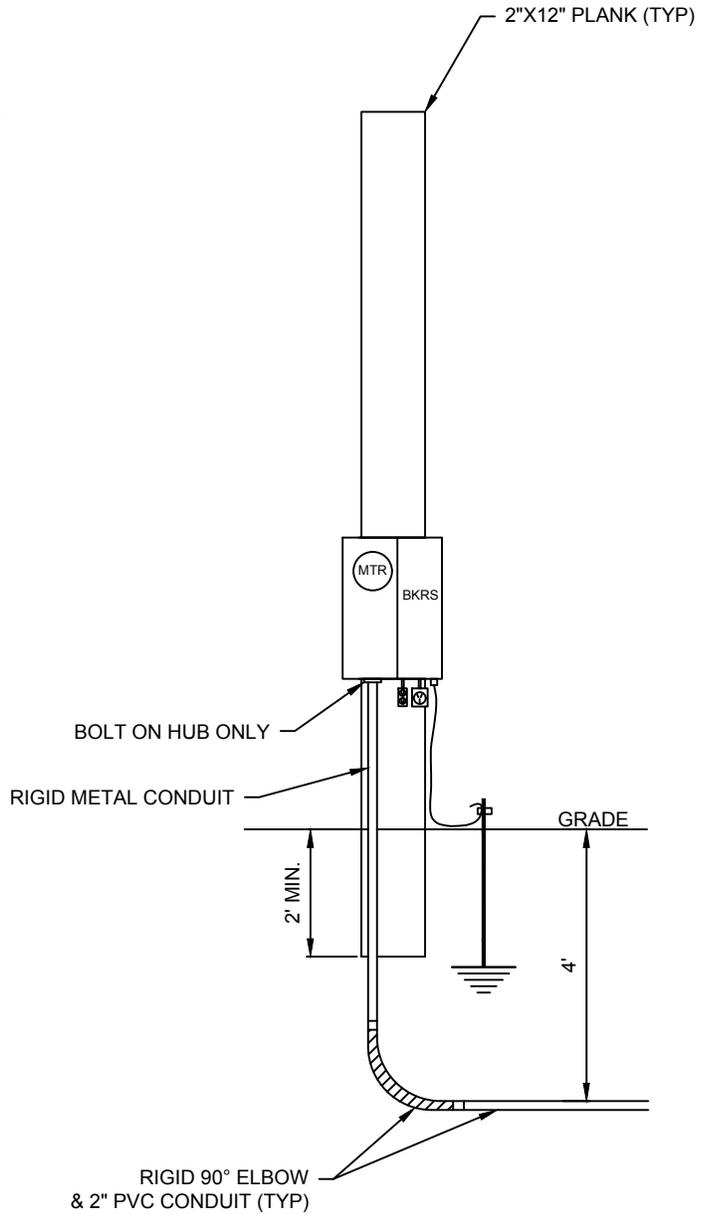


OVERHEAD TEMPORARY POWER

UNDERGROUND TEMPORARY POWER

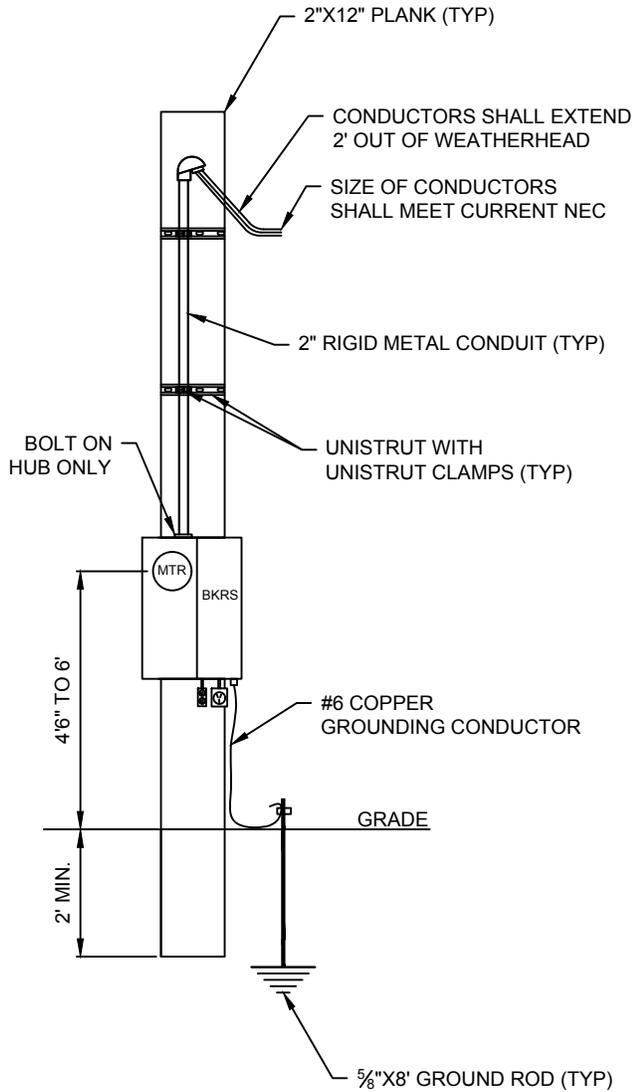

NOTES:

1. ALL MATERIALS TO BE SUPPLIED BY CUSTOMER EXCEPT METER.
2. ALL TEMPORARY EQUIPMENT SHALL COMPLY WITH CURRENT N.E.C. TEMPORARY POWER ARTICLES..
3. TEMPORARY SERVICES MAY NOT BE PLACED ON CITY POLES UNLESS OTHERWISE APPROVED.
4. TEMPORARY POWER POLES TO BE 2\"X12\" PLANKS OR 6\"X6\" POST AND BE BURIED A MINIMUM OF 2' IN DEPTH.
5. SPANISH FORK ELECTRIC DIVISION WILL FURNISH AND INSTALL METER AND CONNECT SERVICE LOOP.
6. SERVICE CONDUCTORS WILL BE #4 C.U. OR LARGER.
7. GROUND ROD TO BE DRIVEN A MINIMUM OF 6' IN UNDISTURBED SOIL.
8. ENOUGH SERVICE CABLE AND SUPPORTS SHALL BE PROVIDED TO COMPLETE DRIP LOOP AND CONNECTIONS AT POLE.
9. ALL TEMPORARY POWER POLES SHALL BE PLACED WITHIN 10' OF SERVICE POWER POLE. CONTACT ELECTRIC DEPT. WITH ANY QUESTIONS.
10. ALL LOCATIONS FOR TEMPORARIES SHALL BE FIRST APPROVED BY ELECTRIC DEPARTMENT.



SPANISH FORK CITY
 40 SOUTH MAIN STREET
 SPANISH FORK, UT 84660
 (801) 804-4550

STANDARD DRAWING

TEMPORARY SERVICE FOR OVERHEAD & UNDERGROUND LINES

DRAWN:	JLR
DESIGN:	CJP
CHECK:	CMT
DATE:	6/22/16

SCALE:	NONE
STANDARD	79