


**1 PHASE
FRONT VIEW**

**3 PHASE
FRONT VIEW**

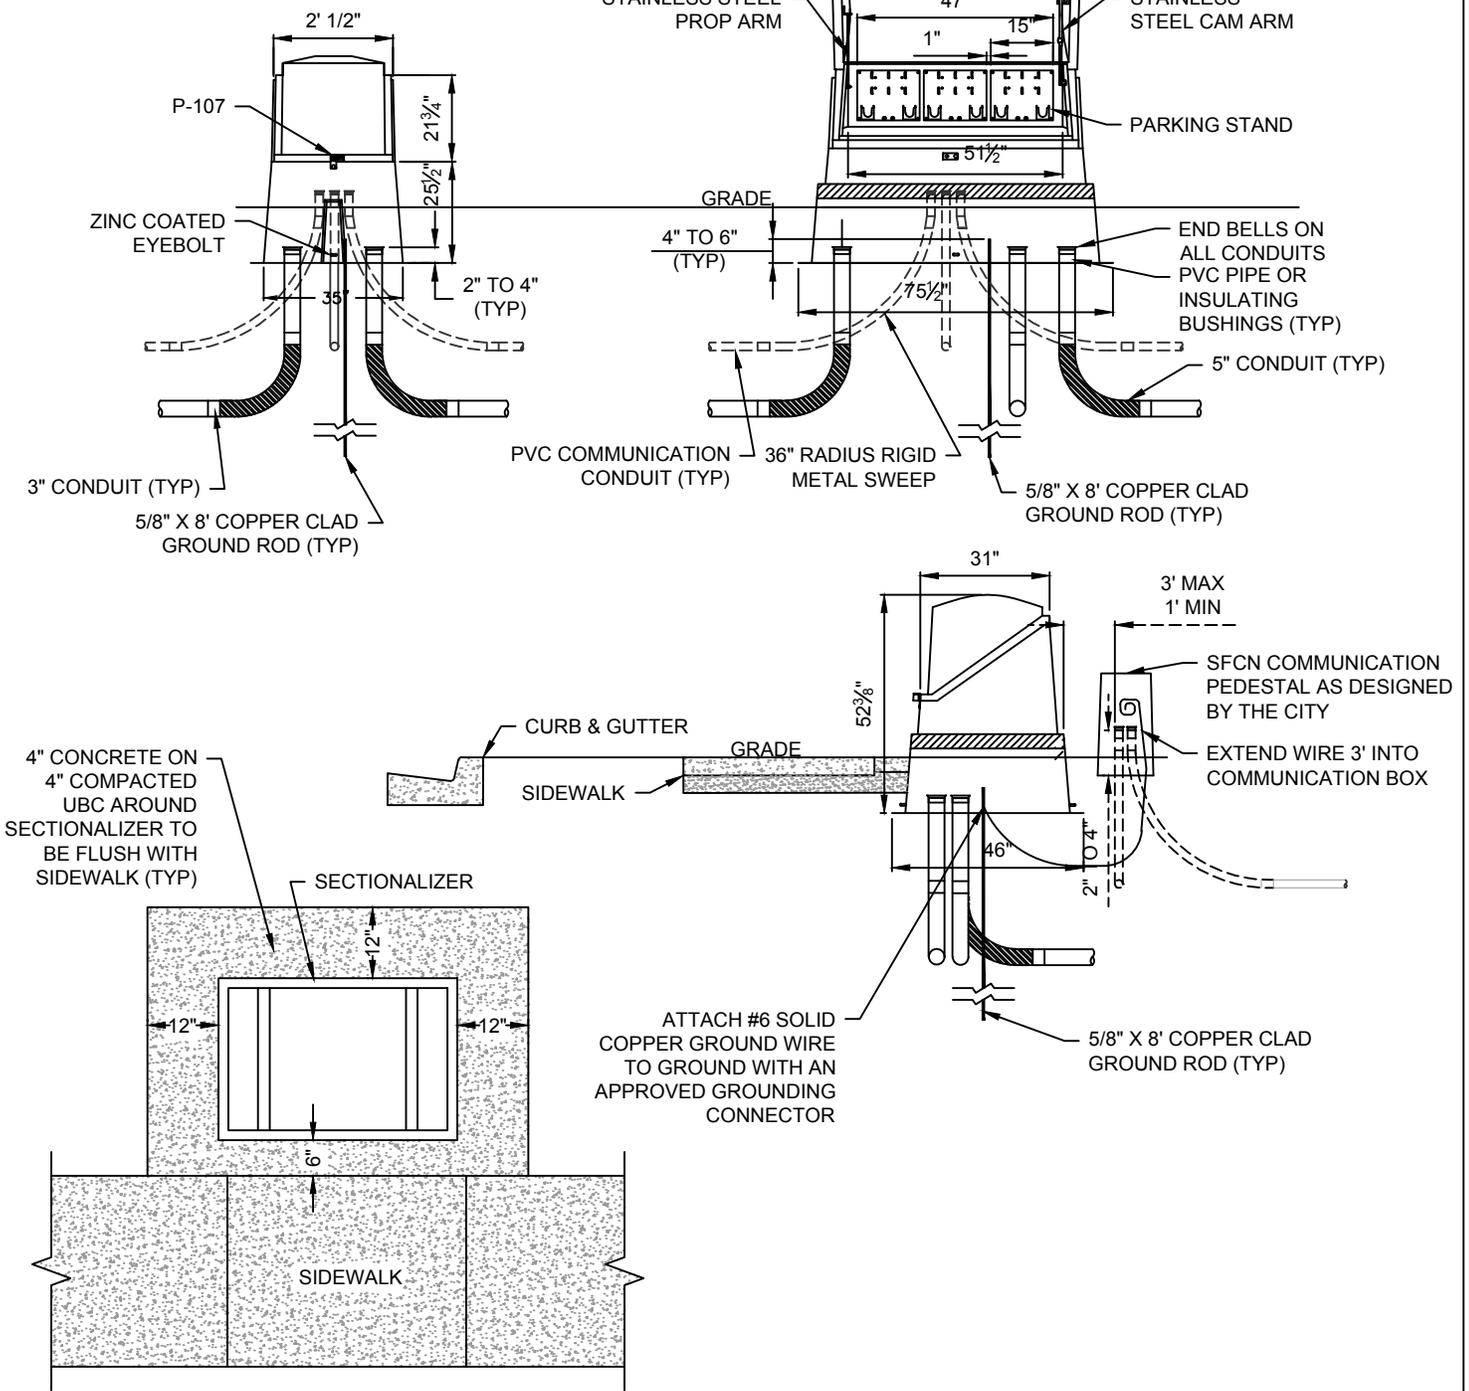

CONCRETE PAD DETAIL

NOTES:

1. SECTIONALIZER CABINET UNITS FOR 100 AMP 1 PHASE AND 3 PHASE ARE TO BE FABRICATED FROM FIBERGLASS COMPOSITE. CONDUIT OPENINGS MUST BE WITHIN THE GROUND SLEEVE WINDOW OF THE SECTIONALIZER. USE MANUFACTURER'S APPROVED GROUND SLEEVE FOR EACH SECTIONALIZER.
2. BLOW IN 1350 LB MULE TAPE IN ALL CONDUITS AND TIE SECURELY TO 4 POINT MOUNTING PLATE.
3. CONTRACTOR TO FURNISH & INSTALL 200-AMP 4-POINT MOUNTING JUNCTION AND PLATES & 4-POINT JUNCTIONS.
4. 200 AMP 1 PHASE SECTIONALIZER P/N: NORDIC ND-150-MG-101-X-X OR WESTERN POWER PRODUCTS P/N: SPM-320-47-MG-DF3
5. 200 AMP 3 PHASE SECTIONALIZER P/N: NORDIC ND-350-MG-101-X-X OR WESTERN POWER PRODUCTS P/N: SPM-540-47-MG-DF3



SPANISH FORK CITY
40 SOUTH MAIN STREET
SPANISH FORK, UT 84660
(801) 804-4550

STANDARD DRAWING

200-AMP 1 AND 3 PHASE FIBERGLASS SECTIONALIZER

DRAWN:	JLR
DESIGN:	CJP
CHECK:	CMT
DATE:	6/22/16

SCALE:	NONE
STANDARD	70